

# CFPC243636-T22

## FIBERGLASS & POLYMER CONCRETE ASSEMBLY

**24" x 36" x 36"** Fiberglass & Polymer Concrete Assembly, No Floor, Natural Color Finish, "T22/36K", 3/8" Hex Bolts.

### LOAD RATINGS

Incidental Traffic - Parking Lot, Sidewalk, Complaint to:

- ❖ WUC 3.6
- ❖ ASTM C 857
- ❖ ANSI/SCTE 77

### MATERIAL PROPERTIES AND ATTRIBUTES

#### Vertical Strength

Polymer Concrete & Fiberglass - 36500

#### Lateral Strength

Fiberglass Body - 4000 PSI

Polymer Concrete material:


- ❖ Advanced composite: Very high strength to weight ratio
- ❖ UV Resistant
- ❖ Impervious to chemicals and moisture
- ❖ Non-conductive
- ❖ High impact resistant
- ❖ Non-metallic

Our Materials have been tested in accordance with ASTM D-543 and ASTM D-570



# DuraVault

Built to Last. Engineered to Protect

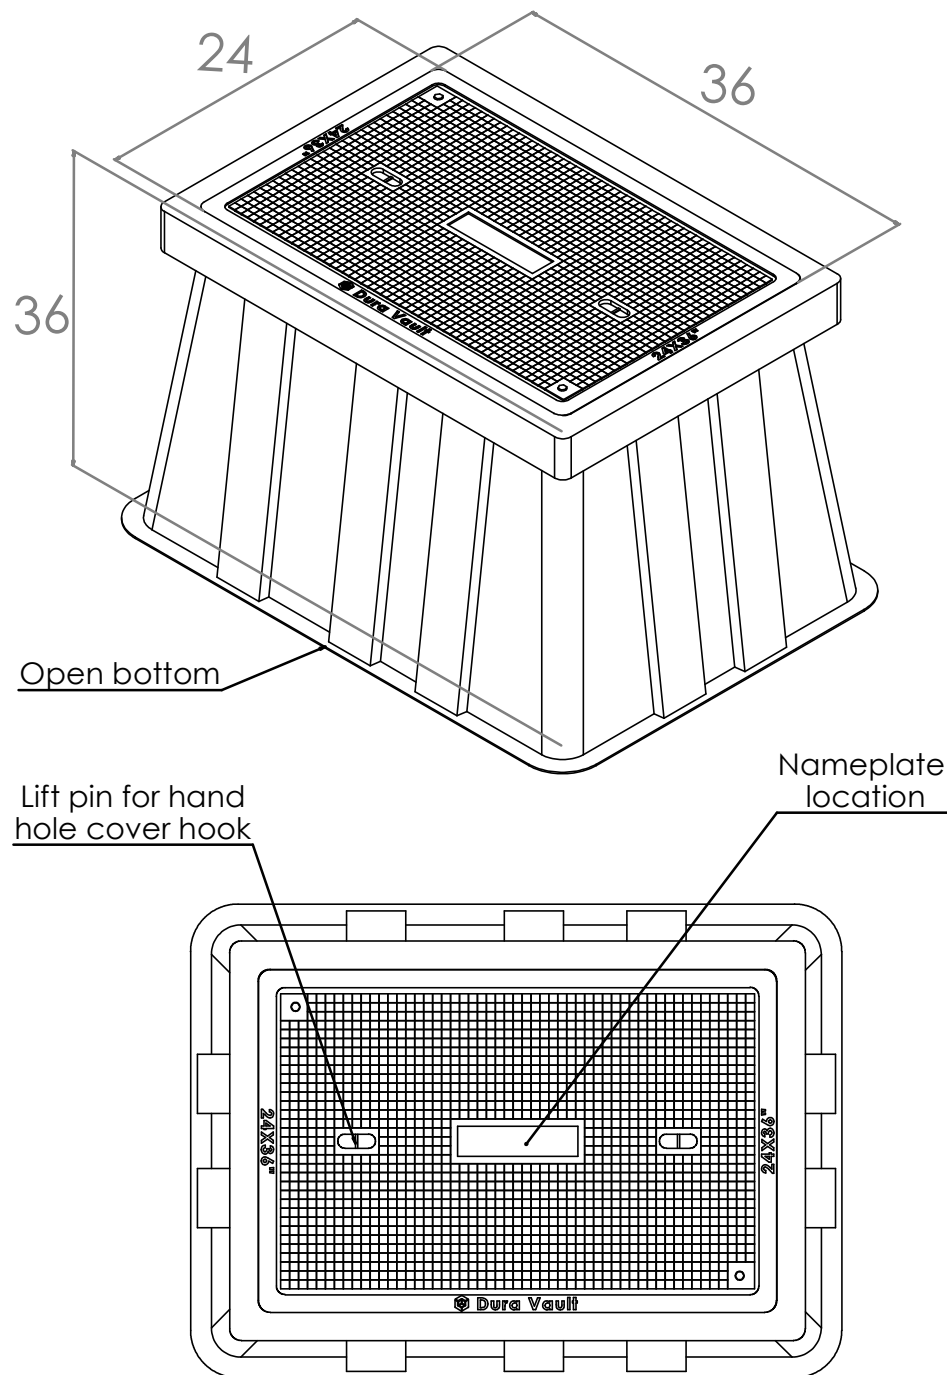

# CFPC243636-T22

FIBERGLASS & POLYMER CONCRETE ASSEMBLY

Contact us at Sales@Cescausa.com or (887) 712-3722



## DuraVault

Built to Last. Engineered to Protect

### AVAILABLE OPTIONS

### Available Sizes:

- Custom Colors
- Classic nameplates Available
  - Electric
  - Telephone
  - Fiber Optic
  - Water
  - Broadband
  - Traffic
  - CATV
  - Communications

- 24x36x12
- 24x36x24
- 24x36x30
- 24x36x36

Custom nameplates are available. Contact customer service.

